


## 通过微带线法评估电磁波吸收性能 (测量频率: 100MHz~40GHz)

Evaluation of electromagnetic waves absorption performance by the micro stripline method  
 (Measurement frequency: 100Mhz - 40 GHz)

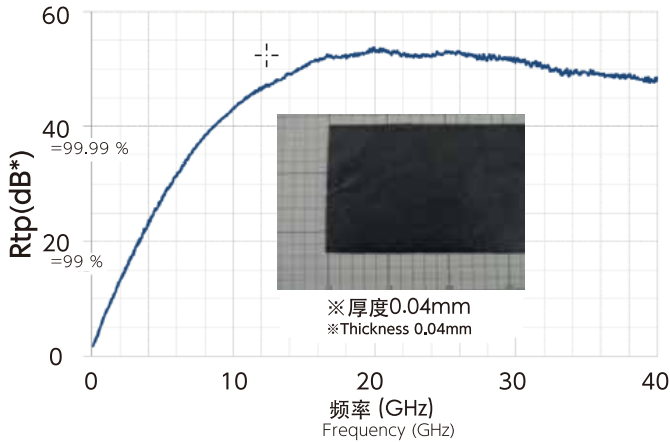

$$R_{tp} = -10 \log_{10} \frac{10^{S_{21}/10}}{1 - 10^{S_{11}/10}}$$

$R_{tp}$ : 传输衰减率  
 $S_{11}$ : 反射系数  
 $S_{21}$ : 透过系数

$R_{tp}$ : Transmission attenuation rate  
 $S_{11}$ : Reflection coefficient  
 $S_{21}$ : Transmission coefficient

单位: dB\* (分贝)

unit: db\*(Decibel)

本测量通过功率比进行计算。

This measurement is calculated with power ratio.

本噪音抑制片会在高频范围内稳定吸收电磁波。

This noise suppression sheet absorbs electromagnetic waves in a stable manner in high frequency areas.

※广濑制纸株式会社提供 ※Provided by Hirose Paper Mfg. Co., Ltd.

# 电磁波噪音抑制片 开发中

Electromagnetic Noise Suppression Sheet Under Development

## 使用模型电路板评估电磁波吸收性能 (测量频率: 100MHz~26.5GHz)

Evaluation of electromagnetic waves absorption performance by using model circuit board  
 (Measurement frequency: 100Mhz - 26.5 GHz)

